



Monarch Plus

Retractable Pleated Insect
Screen



- ◆ Monarch Plus is the perfect choice of insect protection for openings that are either very high or extremely wide.
- ◆ Monarch Plus has a vast array of applications including bi-fold & stacker doors, alfresco dining areas, servery's, entertainment rooms and veranda enclosures.
- ◆ The screen is custom manufactured to sizes up to 2.6m in height and 5.0m in width.





- ◆ The screen attractive, wind resistant, easy to operate and can be moved to any position along the opening
- ◆ The screen offers superior insect protection compared to other retractable screen systems due to the unique mesh retaining clips and cord tensioning system





- ◆ The unique “Barrier Free” design means there are no channels or tracks on the floor to trip over.
- ◆ The mesh guide retracts along with the insect mesh into the main component when the screen is opened leaving a virtually un-impeded pathway through the doorway.





- ◆ Minimal strength or effort is required to open or close the screen. The wire tension system that operates the screen allows you to gently slide the screen to any position along the opening.
- ◆ The pleated insect screen mesh incorporates a mid span tensioning cord, that operates the screen and assist keeping the mesh in place during windy conditions






- ◆ Installation of the screen is relatively simple.
- ◆ Each screen is supplied fully manufactured ready to install.
- ◆ Installation times vary depending on the type of screen being installed and the structure you are fitting to.
- ◆ As a guide allow 30 minutes for a single sash screen and 60 minutes for a double sash.





- ◆ Step one – attach the end caps to the head guide and fix in position.
- ◆ Step two – fix the main component set fixing plate to the jamb of the opening.
- ◆ Step three - line up the floor guide and fix into position using the VHB tape (Very High Bond).

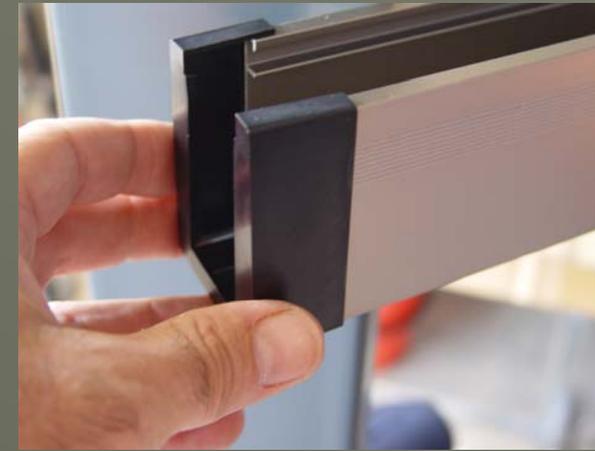



- ◆ Step four - position the main component set and snap onto the fixing plate.
- ◆ Step five – attached the cords to the bracket in the centre of the screen and adjust the anti-jumb bracket
- ◆ Each screen is supplied with a comprehensive installation guide.





- ◆ If the mesh is becomes worn or by installing a replacement mesh set which requires and experienced installer.

Or

Alternatively purchase a replacement main component set housing which is less time consuming to replace.

- ◆ To order replacement mesh just quote the "Lot number" printed on the sticker located on the top rail.





Material

- ◆ Frames : Aluminum
- ◆ Mesh : Pleated Polyester
- ◆ Retracting Mesh Guide : POM
- ◆ Injection parts : POM, Nylon
- ◆ Screws and Fittings: Stainless Steel

Finish

- ◆ Black, White, Bronze Anodised, Dark Bronze Anodised,
- ◆ Clear Anodised (silver), Stain Anodised (Champagne)
- ◆ (Powder painted custom colors are available, extra charges apply)

Size Range

- ◆ Double slide unit 2.8m High x 4.0m Wide
- ◆ Single slide unit 2.8m High x 2.0m Wide
- ◆ Note: Sash height must be 60mm more in height than the sash width.

Adjustment

- ◆ In Width (+10mm)
- ◆ In Height (± 10 mm)

Installation

- ◆ Inside frame and face mount options



FREE CALL 1300 MOZZIE

1 3 0 0 6 6 9 9 3 3

www.screenit.net.au

MOON INTERNATIONAL PTY LTD T/AS
NATIONAL SCREENS ®
PO BOX 558 BURPENGARY
QUEENSLAND 4505
Tel. (61) 7 3886 6632
Fax. (61) 7 3886 8812
Email: sales@nationalscreen.com.au
ABN 99 430 131 330